



(51) International Patent Classification:

A23N 4/08 (2006.01) C11B 1/00 (2006.01)
A23N 7/08 (2006.01)

(21) International Application Number:

PCT/IB2012/054742

(22) International Filing Date:

12 September 2012 (12.09.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

11425285.1 25 November 2011 (25.11.2011) EP

(71) Applicant (for all designated States except US): **UNIVERSITÀ DEGLI STUDI DI BARI** [IT/IT]; Piazza Umberto I, 1, I-70121 Bari (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **CLODOVEO, Maria Lisa** [IT/IT]; c/o Università degli Studi di Bari, Dipartimento di Scienze agro-ambientali e territoriali, Via Amendola 165/A, I-70126 Bari - BA (IT).

(74) Agents: **ROMANO, Giuseppe** et al.; c/o Società Italiana Brevetti S.p.A., Piazza di Pietra 38-39, I-00186 Rome (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD AND APPARATUS FOR THERMAL CONDITIONING OF OLIVES OR OTHER OLEAGINOUS FRUITS COMBINED WITH A CRUSHING AND KNEADING SYSTEM OF OLIVES OR OTHER OLEAGINOUS FRUITS IN CONTROLLED OR MODIFIED ATMOSPHERE

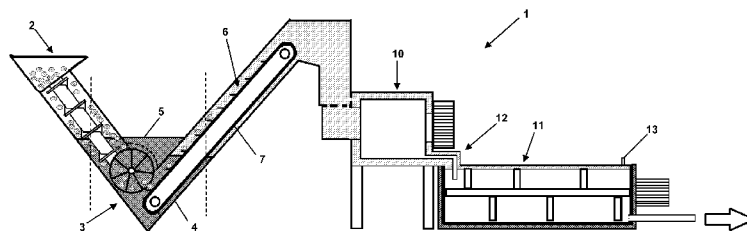


FIG. 1

(57) Abstract: The present invention lies in the field of the treating and transforming of olives or other oleaginous fruits in processes for extracting virgin oils. In particular, it refers to a method and an apparatus for thermal treatment of olives or other oleaginous fruits, for crushing in controlled or modified atmosphere and for kneading in controlled or modified atmosphere, allowing to reduce the kneading times, improving the working capacity of the line, concomitantly preserving the quality of the product.

WO 2013/076592 A1

METHOD AND APPARATUS FOR THERMAL CONDITIONING OF OLIVES OR OTHER OLEAGINOUS FRUITS COMBINED WITH A CRUSHING AND KNEADING SYSTEM FOR OLIVES OR OTHER OLEAGINOUS FRUITS IN CONTROLLED OR MODIFIED ATMOSPHERE

5

DESCRIPTION

The present invention lies in the field of the treating and transforming of olives. In particular, it refers to a method and an apparatus comprising a section for thermal conditioning of olives or other oleaginous fruits, a section for crushing in controlled or modified atmosphere and a section for kneading in controlled or modified atmosphere, to be used in processes for extracting virgin oil from olives or other oleaginous fruits.

As is well known, currently the systems for mechanically extracting virgin oils from olives are basically of two types: discontinuous-type systems and continuous-type systems.

Discontinuous-type systems, generally comprised of a millstone combined with hydraulic presses, generally have a low working capacity and unavoidably require a high amount of labour. For these reasons they are deemed obsolete and are dying out, superseded by continuous-type systems.

Systems defined as "continuous-type" are generally comprised of a mechanical crusher, a kneader and a horizontal-axis centrifugal separator (decanter).

The "continuous" appellation refers to the fact that two (mechanical crusher and decanter) out of the three machines making up the system operate continuously; the kneader, which actually is a machine working in batches, is located between these two continuous apparatuses.

Traditionally, the kneading step consists in a slow stirring (12-18 rpm) of the olive paste at 27-32°C, for a time comprised between 30 and 60 minutes, depending on the characteristic of the raw material. The object of the kneading is on the one hand to foster coalescence of oil droplets into drops of greater size, more easily separable in a centrifugal field, and on the other hand to reduce the viscosity value of the olive paste so as to optimize phase separation inside the decanter (oil/ vegetation water/ olive residue).

The kneading step actually represents the bottleneck of the continuous extraction process. At present, the system employed to assure continuity to the process without having to interrupt the activity of the machines upstream and downstream of the kneader consists in arranging plural kneading machines in parallel, with the burden of a heavy investment in plant engineering. Oil mills not equipped with plural kneaders arranged in parallel actually operate discontinuously and do not fully exploit the working capacity of the oil press and of the decanter.

One of the crucial factors causing such lengthy kneading times is the time period needed for the freshly crushed olive paste to reach the process temperature (27-32°C). This period has a length on average equal to at least one-third of the total kneading time, as the olive paste outlet from the crusher may have temperatures comprised
5 between 18 and 26°C, depending on the temperature of the working environment and the type of crusher employed.

The apparatus subject-matter of the present invention is comprised of three distinct sections:

- 10 - a section for pretreatment of olives in a liquid medium, preferably water, which can be heated (from 30 to 90° C, preferably to 60-72 °C);
- a crusher, which is able to operate also in controlled or modified atmosphere;
- a kneader, which is able to operate also in controlled or modified atmosphere.

The method and the apparatus described envisage in the first section the passage of olives through a vat containing heated water, preferably heated to the temperature of
15 60-72 °C, and for a short interval, preferably comprised between 2 and 5 minutes. The water held in the vat carries out a three-fold function: it

- allows to isolate olives from air before they get into the section where atmosphere is controlled or modified;
- acts as hydraulic cap, useful to confine the atmosphere inside of the crusher and
20 the kneader;
- thermally conditions the olives, by preheating the raw matter so as to shrink the time period needed for the olive paste to reach process temperature in the kneading step.


It is known that, in kneading, time and temperature are inversely correlated
25 parameters. Data present in the literature demonstrate that, kneading times being equal, an increase in the process temperature causes an increase in the percentage of oil extracted from the paste. Therefore, with an increase in temperature the kneading times shrink. Moreover, the increase in kneading temperature positively influences also the values of density and viscosity of the liquid phases, causing an improved
30 separation of the same from the solid phase inside the centrifugal decanter.

Generally, in plants currently in use for extraction of virgin oil from olives, kneading temperatures comprised between 28 and 32°C are employed. Such temperatures should not be exceeded, in order not to accelerate the oxidative processes against the lipid matrix, fostered by presence of oxygen in the olive paste. In fact, said oxygen

penetrates the olive paste right from the crushing step, as the brisk rotation of the drupe crushing members causes incorporation of air in the product. Oxygen can still be incorporated during paste stirring in the kneading step, above all when the rotary reel of the kneader is not totally covered by the paste.

5 The mechanism of chemical oxidation of unsaturated fats is amply influenced by oxygen availability. In the non-enzymatic lipid oxidation process, atmospheric oxygen leads to formation of hydroperoxides (primary oxidation products) starting from unsaturated fatty acids, by means of a radical action mechanism.


In the first stage of initiation there is the formation of very unstable free radicals, starting from a fatty acid which has lost a hydrogen atom from an allyl methylene (carbon adjacent to a carbon engaged in a double bond).



Then the radical, by quickly reacting with oxygen, leads to the formation of a peroxide radical:



This highly reactive compound continues to react with the unsaturated fatty acids, leading to the formation of hydroperoxides (primary oxidation products) and other radicals, which restart the cycle:



20 From this point a chain reaction starts, since in the presence of oxygen the radical obtained forms again a peroxide radical, repeating the process (propagation) and thereby causing hydroperoxide accumulation.

During extraction of oil from olives, oxidative processes can be reduced by eliminating the oxygen into contact with the olive oil paste in all steps of the extraction process. Under such controlled conditions it is possible to raise the kneading temperatures also of 20-30°C with respect to the method.

Given the known correlation between time and kneading temperature, this thermal increase can be translated into a reduction of the process time.

30 From oxygen elimination a further advantage can be attained: also oxidasic enzymes unfavourable to oil quality are inhibited.

Crushing frees enzymatic complexes which have a negative activity on some components of the olive paste; in particular, it frees enzymes, such as polyphenol oxidase and peroxidase; in the kneading step those, in the presence of oxygen, catalyse the degradation of phenolic substances, limiting their final concentration in oil.

Elimination of oxygen from the matrix inhibits the activity of these enzymes.

As to the influence of the kneading temperature on the solubility of lipid-phase phenolic substances, it has been observed that oils obtained at higher temperatures have a higher phenolic content with respect to oils obtained at lower temperatures. This phenomenon is explained in the light of the fact that the solubility of phenolic compounds in lipid matrices depends on temperature. By extracting the virgin oils from olives in the absence of oxygen, polyphenolic substances are protected from oxidation, and their transfer from vegetable tissues to the lipid phase is fostered by increasing the process temperature.

10 Kneaders operating in an inert atmosphere, as described in US Pat. Appln. 2006/0165861, are currently available on the market. According to what is described in said Patent, only the head space of the kneader is inertized; in the apparatus subject-matter of the present invention, by inertizing the crusher also the oxygen dissolved in the olive paste during the crushing is eliminated; said oxygen, when present in a significant amount, promotes oxidative phenomena on unsaturated fatty acids and polyphenolic substances.

As to the thermal conditioning of olives before the crushing, data reported in the literature highlight that the dipping of olives in water at temperatures comprised between 60 and 72 °C for 3 minutes causes no significant changes in acidity values, indices of specific absorption in the ultraviolet range (K232, K270), peroxide index and organoleptic characteristics, whereas it causes increases in the content of chlorophylls and carotenoids of the extracted oil.

The preliminary thermal treatment of olives destined to transformation further contributes to the inactivation of heat-sensitive enzymes, catalysts of undesired reactions, and can contribute to reduce the initial microbial charge of olives and foster the elimination of air contained inside vegetable tissues.

Inertized milling is a technology already widely used in the chemical-pharmaceutical field, but in the food-making field it has never been applied yet to olive crushing.

Oxygen elimination, both in the crushing and in the kneading step, would allow in the kneading a use of temperatures higher than those applied in traditional systems (from 28-32°C to 60-72°C) as one of the elements capable of promoting lipid matrices oxidation is subtracted.

Object of the present invention is to remove oxygen from the olive paste not only during the kneading, but also and above all in the crushing step, to prevent

atmospheric oxygen from being incorporated in the crushed paste. Thus, it is possible to raise the process temperature and reduce the process length, without exposing to an excessive oxidative risk the lipid matrix.

Hence, object of the present invention is to provide an innovative solution to the problems still left open by the known art, by providing a method for treatment and transformation of olives as defined in independent claim 1.

A further object of the present invention is to provide an apparatus for treatment and transformation of olives as defined in claim 9.

Secondary features of the present invention are instead defined in the corresponding dependent claims thereof.

As will be illustrated hereinafter in the description, the present invention entails several advantages.

First of all, the present invention allows to reduce the kneading times, improving the working capacity of the line and thereby allowing to reduce the number of kneaders to be arranged in parallel, with an entailed reduction of the initial investments, concomitantly preserving the quality of the product.

The modularity of industrial plants for mechanical extraction of virgin oils from olives allows the introduction of this device also on pre-existing transformation lines with a limited investment. Moreover, the reduction of the kneading times allows to optimize the working capacity of the entire transformation line.

The apparatus described is able to work also in the traditional conditions of temperature and atmosphere, guaranteeing a flexibility of use depending on the process and on the desired product.

The use of an inert gas (e.g., nitrogen) during the crushing allows to preserve the chemico-physical properties of the product. Within the scope of the present invention, an inert gas is in fact applied in the step preceding the kneading. Presence of oxygen from other sources can be ruled out, since as long as olives are whole, oxygen contained inside vegetable tissues is used up by the respiratory activity persisting even after detachment of drupes from the tree. Moreover, the thermal treatment preceding the crushing fosters the elimination of residual air possibly still occluded in vegetable tissues before olives are crushed.

These and further advantages, as well as the features and operation modes of the present invention, will be made apparent from the following detailed description of an embodiment thereof, given by way of example and not for limitative purposes.

Reference will be made to the figures of the annexed drawings, wherein Figure 1 is an exemplary scheme of the apparatus according to the present invention.

The present invention will hereinafter be described in detail, making reference to the above-indicated figure.

5 Figure 1 shows an apparatus for treatment of olives according to the present invention. The apparatus of Figure 1 is therefore suitable for implementing the method of treatment subject-matter of the present invention.

In particular, an apparatus 1 according to the present invention comprises a section 2 for inletting olives to be treated.

10 Olives inlet in the apparatus are then carried to the bottom of the vat 4 inside which they will undergo thermal treatment. A device 3 keeps the olives on the bottom and sends them to the conveyor belt 7 feeding the crusher, preventing them from floating to the surface, dispersing in the entire volume of the vat.

The rates of the device for inletting olives in the vat and of the conveyor belt regulate 15 the length of the thermal treatment.

According to the preferred embodiment of the present invention, the thermal treatment section 3 comprises heating means suitable for carrying out a controlled heating of olives at a temperature comprised between 30°C and 90°C.

20 Even more preferably, the heating of olives is carried out at a temperature comprised between 60°C and 72°C.

In particular, the heating means comprises an olive collecting vat 4 apt to contain a liquid 5, preferably water, kept at a controlled temperature, as specified in the foregoing.

25 Therefore, in accordance with the method according to the present invention, the olives coming from the sorting and the washing are transferred into a vat 4, preferably having a conical bottom, which contains water at the temperature of 60-72°C, in order to be subjected to a brief thermal treatment (preferably 2-5 minutes).

30 According to the embodiment described herein, in the vat 4 a conveyor belt 7 is immersed, confined inside a first transfer duct 6 for transferring thermally treated olives to a crusher 10.

According to the present invention, the first transfer duct 6 is isolated from the outside environment, e.g. made in the form of a tubular duct.

According to the present invention, the crusher 10 is apt to operate in controlled or modified atmosphere. Therefore, the process according to the present invention

envisages that the conveyor belt 7 conveys olives from the conical-bottom vat 4 to the chamber isolating the crusher 10 from the environment, in order to feed the crushing device and carry out a step of crushing, in controlled or modified atmosphere, thermally treated olives to obtain an olive paste.

5 The crushed product, i.e. the olive paste, is then transferred directly to a hermetic kneader 11, apt to operate in controlled atmosphere, to knead the olive paste.

Olive paste transfer preferably occurs via a second transfer duct 12 for transferring olive paste to the kneader 11. Of course, also such a second transfer duct 12 is isolated from the outside environment.

10 Advantageously, the kneader 11 comprises a one-way valve 13 which allows the outletting of air or gas during the loading step, but not allowing their inletting into the kneading environment.

According to the preferred embodiment of the method of treatment described herein, the atmosphere confined inside the apparatus, both of the crusher and of the kneader,
15 can be controlled or modified by inletting an inert gas (e.g., nitrogen, argon, carbon dioxide, helium), or a mixture thereof with other gases, thereinto, thereby carrying out a step of inertizing the crushing environment and/or the kneading environment.

For this purpose, it may therefore be envisaged that the apparatus 1 comprise means for inertizing the crusher and/or the kneader, in order just to obtain a processing
20 in controlled or modified atmosphere.

Such inertizing means will therefore comprise means for inletting an inert gas into the crushing and/or kneading environment, where, as mentioned hereto, the gas may be selected, e.g., from: argon, carbon dioxide, helium or a mixture of the same with other gases.

25 The configuration of the apparatus is such that the atmosphere upstream of the crusher, therefore in the transfer duct 6, is balanced by the hydrostatic pressure of the water vat 4, whereas downstream of the crusher it is delimited by the hermetic kneader which allows only the outletting of gas, via the valve 13, but not its inletting.

This can be further obtained also thanks to the applying of an overpressure of the
30 inert gas, with respect to the atmospheric pressure in the crushing and/or kneading environment.

Advantageously, the inertizing means can be such as to inlet the gas in the region of the crusher. Thus, it is the crusher which is directly inertized, but, since the kneader 11 is in hydraulic communication therewith, the latter is therefore inertized.

Thus, olive paste is produced in the crusher, preventing entrainment of environment air by olive paste feeding to the kneader. Therefore, the olive paste, shielded from contact with atmospheric oxygen, can be kneaded at temperatures higher than those traditionally employed without the onset of oxidative reactions, and obtaining the relevant advantages in terms of amount of extracted oil and reduction of kneading times.

The present invention has been hereto described with reference to a preferred embodiment thereof. It is understood that other embodiments might exist, all falling within the concept of the same invention, and all comprised within the protective scope of the claims hereinafter.

CLAIMS

1. A method for treatment of olives, comprising the following steps:
- carrying out a thermal treatment of olives;
 - carrying out a step of crushing, in controlled or modified atmosphere, said thermally treated olives, to obtain an olive paste; and
 - carrying out a step of kneading, in controlled or modified atmosphere, said olive paste, to homogenize said olive paste.
2. The method according to claim 1, wherein said thermal treatment comprises a heating of olives at a temperature comprised between 30°C and 90°C.
3. The method according to claim 2, wherein said heating is carried out at a temperature comprised between 60°C and 72°C.
4. The method according to one of the preceding claims, wherein said thermal treatment is carried out by passing the olives in a liquid kept at a controlled temperature.
5. The method according to one of the preceding claims, wherein said controlled or modified atmosphere of the crushing and/or kneading step is obtained by inletting of a gas or a gas mixture in the crushing and/or kneading environment.
6. The method according to claim 5, wherein said inertizing is carried out with an inert gas selected from: nitrogen, argon, carbon dioxide, helium or a mixture thereof, brought to a pressure higher than the atmospheric pressure in the crushing and/or kneading environment.
7. An apparatus (1) for treatment of olives, comprising
- a section (3) for thermal treatment of olives;
 - a crusher (10) apt to operate in controlled or modified atmosphere, to obtain olive paste; and
 - a kneader (11) apt to operate in controlled atmosphere, to knead said olive paste.
8. The apparatus (1) according to claim 9, further comprising a first transfer duct (6) for transferring thermally treated olives to said crusher (10), said first transfer duct (6) being isolated from the outside environment.
9. The apparatus (1) according to claim 9 or 10, further comprising a second transfer duct (12) for transferring olive paste produced by the crusher (10) to said kneader (11), said second transfer duct (12) being isolated from the outside environment.
10. The apparatus (1) according to one of the claims 9 to 11, wherein said thermal

treatment section (3) comprises heating means (4, 5) apt to carry out a controlled heating of olives at a temperature comprised between 30°C and 90°C.

11. The apparatus (1) according to claim 12, wherein said heating is carried out at a temperature comprised between 60°C and 72°C

5 **12.** The apparatus (1) according to claim 12 or 13, wherein said heating means (4, 5) comprises a vat (4) for collecting olives, apt to contain a liquid (5) kept at a controlled temperature.

13. The apparatus (1) according to one of the claims 9 to 14, comprising means for inertizing said crusher and/or said kneader (11), to obtain a processing in controlled or
10 modified atmosphere.

14. The apparatus (1) according to claim 15 or 16, wherein said inertizing means comprises means for inletting an inert gas into the crushing and/or kneading environment, said gas being selected from: nitrogen, argon, carbon dioxide, helium, said inertizing means being apt to bring said inert gas to a pressure higher than
15 atmospheric pressure in the crushing and/or kneading environment.

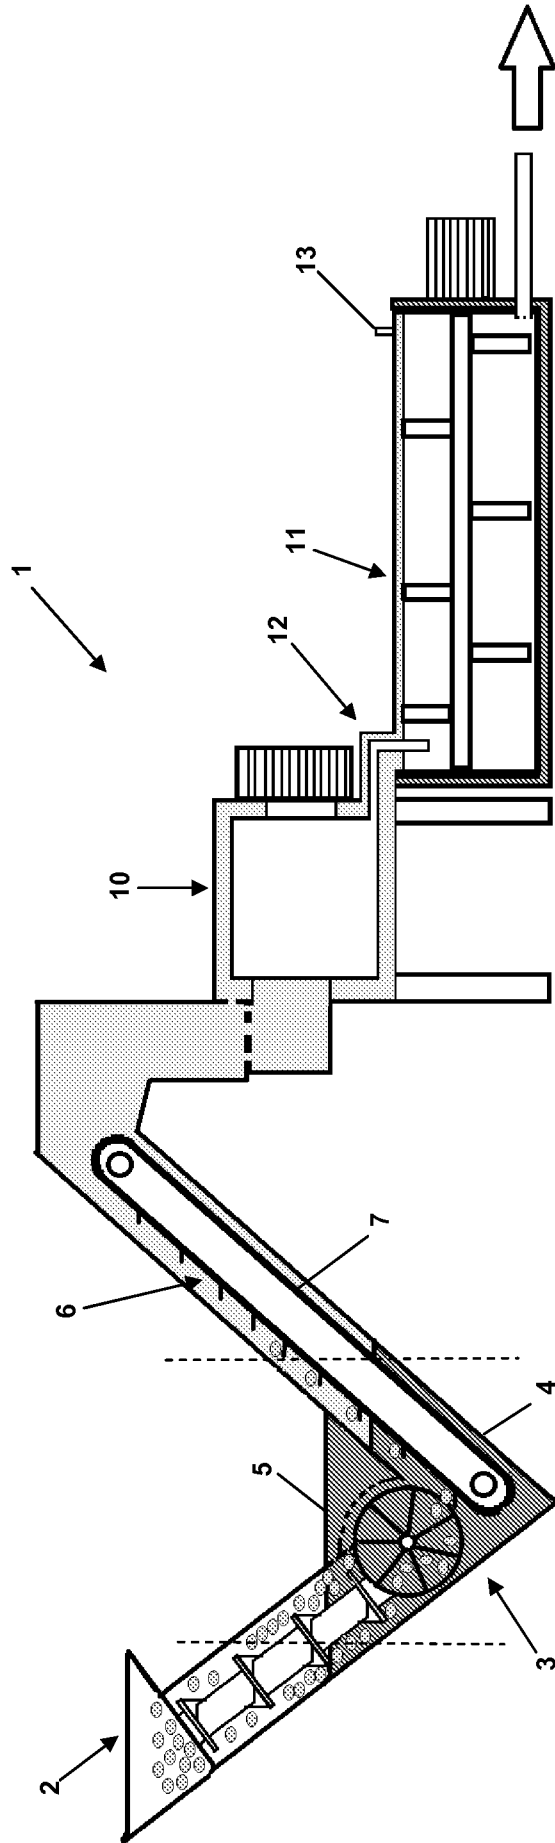


FIG. 1

INTERNATIONAL SEARCH REPORT

International application No PCT/IB2012/054742

A. CLASSIFICATION OF SUBJECT MATTER
 INV. A23N4/08 A23N7/08 C11B1/00
 ADD.
 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 A23N C11B
 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 EPO-Internal, WPI Data, BIOSIS, COMPENDEX, FSTA

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2007/048789 A1 (AIR LIQUIDE [FR]; AIR LIQUIDE ITALIA S P A [IT]; FRATI MAURIZIO [IT]) 3 May 2007 (2007-05-03) page 2, lines 19-21 claims 1,3,7,8,11,12,15,19,20; figure 3	1-14
A	WO 2006/093474 A1 (GURGUC ZEYNEP [TR]) 8 September 2006 (2006-09-08) page 6, lines 7-9 figure 1	1-14
A	EP 1 260 571 A2 (WESTFALIA SEPARATOR INDUSTRY G [DE] WESTFALIA SEPARATOR AG [DE]) 27 November 2002 (2002-11-27) claims 1-30; figure 1	1-14
	----- -/--	

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 16 October 2012	Date of mailing of the international search report 02/11/2012
--	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Götz, Michael
--	---

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2012/054742

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 522 119 A (FINCH HARVEY E [US] ET AL) 11 June 1985 (1985-06-11) the whole document	1-14
A	----- US 2006/165861 A1 (PICCI DAVID [IT]) 27 July 2006 (2006-07-27) cited in the application claims 10-16; figure 1 -----	1-14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/IB2012/054742

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2007048789 A1	03-05-2007	EP 1942745 A1 WO 2007048789 A1	16-07-2008 03-05-2007

WO 2006093474 A1	08-09-2006	TR 200706088 T1 WO 2006093474 A1	21-01-2008 08-09-2006

EP 1260571 A2	27-11-2002	AT 305501 T DE 10123651 A1 EP 1260571 A2 ES 2245999 T3 PT 1260571 E	15-10-2005 28-11-2002 27-11-2002 01-02-2006 30-11-2005

US 4522119 A	11-06-1985	NONE	

US 2006165861 A1	27-07-2006	NONE	
